





DCL50ZYALS3



- Beeper: Sealed, pulsed tone max. 94 dB
- LED tower light
- Individually controllable
- Mechanical screw-in thread M30 x 1.5
- Protection class IP67
- Acoustic signaller, pulsed (COL 2)
- Monochrome: Yellow (COL 1)
- Cable, 2m
- Operating voltage 85...264 VAC

Type	DCL50ZYALS3
Article no.15550	15550
Purpose	LED indicator light
Operating mode	Tower light
Design	Cylindrical/Smooth
Construction type designation	TL50
Housing material	Plastic, ABS
Window material	Plastic, diffuse
Electrical connection	Cable, 4-wire
Cable length	2 m
Cable Jacket Material	PVC
Useful life	50000 h
Protection class	IP67
Ambient temperature	-20...+50 °C
Approvals	CE, UL listed
Operating voltageU_o	≥ 85 VAC
Operating voltage U_b	264 VAC
AC rated operational current	80 mA
Response time typical	< 10 ms
Light type	Yellow
Beeper sound	Gepulst
Volume	94 dB

Wiring Diagram

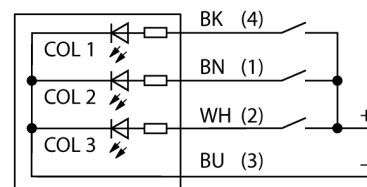

Functional principle

Multicolor/multifunction display
 Rugged and well-priced LED tower, easy to install
 Illuminated segments for clear operator guidance and display of system status.
 Display of up to 3 colors.
 Compact devices, no controller required
 No mounting