



- for round cylinders
- DC 3-Draht
- ø 8 mm

Output	PNP-NO
Supply voltage UB	10 - 30 V DC
No-load supply current I ₀	≤ 10 mA
Rated operational current I _e	max. 200 mA
Voltage drop U _d	≤ 3 V at I _e = 200 mA
Switching frequency f	max. 5000 Hz
Operating temperature range	-25°C ... +70°C
Short circuit protection / at current	clocking / min. 250 mA
Reverse polarity protection	integrated
Dielectric test voltage ac (rms.) U _i	- - - V
Degree of protection acc. to DIN 60 529	IP67
On/off indication	LED
Connection	2,5m PVC-cable 3 x 0,14mm ²
Housing material	plastics

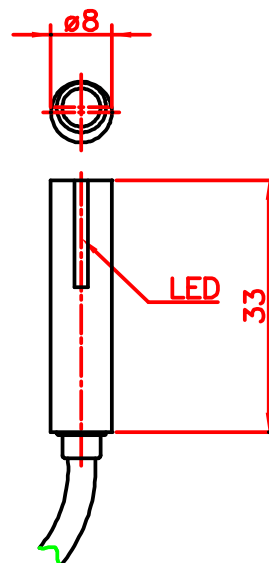

Applications, where personal safety depends on the function of the devices are not authorized by the manufacturer. Technical modifications and errors excepted.

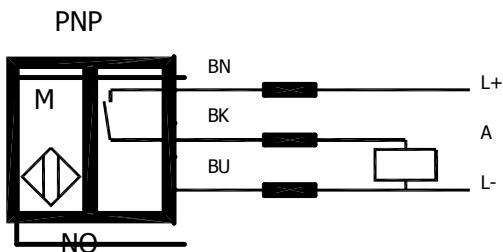