

3-Wire High Pressure 3-Leiter Druckfest

shielded
bündig
M14x1.5 | 3 mm



standard
500 bar · 7251 psi

shielded
bündig
M14x1.5 | 3 mm






standard
500 bar · 7251 psi

shielded
bündig
M14x1.5 | 3 mm



standard
1000 bar · 14503 psi




Sensing Distance	Schaltabstand	3 mm	3 mm	3 mm
Max. Pressure	Druckbelastbarkeit	500 bar · 7251 psi	500 bar · 7251 psi	1000 bar · 14503 psi
Housing Size	Gehäusegröße	M14x1.5	M14x1.5	M14x1.5
Operating Voltage	Betriebsspannung	10...30 V _{DC}	10...30 V _{DC}	10...30 V _{DC}
Reverse Polarity Protection	Verpolungsschutz	built-in integriert	built-in integriert	built-in integriert
Current Consumption	Stromverbrauch	<8 mA	<8 mA	<8 mA
Current Load Capability	Ausgangslastbarkeit	200 mA	200 mA	200 mA
Short Circuit Protection	Kurzschlusschutz	built-in integriert	built-in integriert	built-in integriert
Voltage Drop	Spannungsabfall	<1.5 V @ 200 mA	<1.5 V @ 200 mA	<1.5 V @ 200 mA
Switching Frequency	Schaltfrequenz	1000 Hz	1000 Hz	500 Hz
Correction Factor	Korrekturfaktor	Alu 0.45 · Brs 0.50 · VA 0.85	Alu 0.45 · Brs 0.50 · VA 0.85	Alu 0.45 · Brs 0.50 · VA 0.85
Repeatability	Wiederholgenauigkeit	<3 %	<3 %	<3 %
Hysteresis	Hysterese	3...15 %	3...15 %	3...15 %
Operating Temperature	Betriebstemperatur	-25...+70 °C	-25...+70 °C	-25...+70 °C
Protection Class	Schutzklasse	IP 69k, IP 67	IP 69k, IP 67	IP 69k, IP 67
Sensing Face	Sensorfläche	ceramic Keramik	ceramic Keramik	SS303 Edelstahl
Housing Material	Gehäusewerkstoff	SS303 Edelstahl	SS303 Edelstahl	SS303 Edelstahl
Connection	Anschluss	PVC, ultraflex	conn. M12 Stecker M12	PVC, ultraflex
Switching Indicator	Schaltanzeige			
Article Code PNP, NO	—/—	IHD14-S3PO56-N2P	IHD14-S3PO65-N12	IHD14-S3PO56S-N2P
Article Code PNP, NC	—/—	IHD14-S3PC56-N2P	IHD14-S3PC65-N12	IHD14-S3PC56S-N2P
Article Code NPN, NO	—/—	IHD14-S3NO56-N2P	IHD14-S3NO65-N12	IHD14-S3NO56S-N2P
Article Code NPN, NC	—/—	IHD14-S3NC56-N2P	IHD14-S3NC65-N12	IHD14-S3NC56S-N2P

shielded
bündig
M14x1.5 | 3 mm




standard
1000 bar · 14503 psi



shielded
bündig
M14x1.5 | 3 mm




standard
1000 bar · 14503 psi



shielded
bündig
M14x1.5 | 3 mm




standard
1000 bar · 14503 psi



shielded
bündig
M14x1.5 | 3 mm




standard
1000 bar · 14503 psi

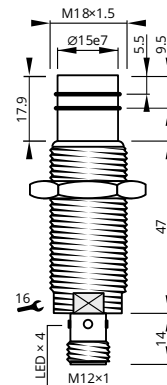

shielded
bündig
M14x1.5 | 3 mm



standard
1000 bar · 14503 psi

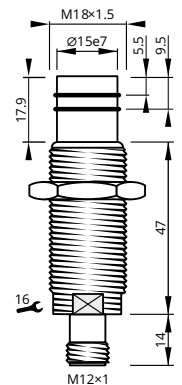

3 mm	3 mm	3 mm	3 mm	3 mm
1000 bar · 14503 psi	1000 bar · 14503 psi	1000 bar · 14503 psi	1000 bar · 14503 psi	1000 bar · 14503 psi
M14x1.5	M14x1.5	M14x1.5	M14x1.5	M14x1.5
10...30 V _{DC}	10...30 V _{DC}	10...30 V _{DC}	10...30 V _{DC}	10...30 V _{DC}
built-in integriert	built-in integriert	built-in integriert	built-in integriert	built-in integriert
<8 mA	<8 mA	<8 mA	<8 mA	<8 mA
200 mA	200 mA	200 mA	200 mA	200 mA
built-in integriert	built-in integriert	built-in integriert	built-in integriert	built-in integriert
<1.5 V @ 200 mA	<1.5 V @ 200 mA	<1.5 V @ 200 mA	<1.5 V @ 200 mA	<1.5 V @ 200 mA
500 Hz	1000 Hz	1000 Hz	1000 Hz	1000 Hz
Alu 0.45 · Brs 0.50 · VA 0.85	Alu 0.45 · Brs 0.50 · VA 0.85	Alu 0.45 · Brs 0.50 · VA 0.85	Alu 0.45 · Brs 0.50 · VA 0.85	Alu 0.45 · Brs 0.50 · VA 0.85
<3 %	<3 %	<3 %	<3 %	<3 %
3...15 %	3...15 %	3...15 %	3...15 %	3...15 %
-25...+70 °C	-25...+70 °C	-25...+70 °C	-25...+70 °C	-25...+70 °C
IP 69k, IP 67	IP 69k, IP 67	IP 69k, IP 67	IP 69k, IP 67	IP 69k, IP 67
SS303 Edelstahl	ceramic Keramik	ceramic Keramik	ceramic Keramik	ceramic Keramik
SS303 Edelstahl	SS303 Edelstahl	SS303 Edelstahl	SS303 Edelstahl	SS303 Edelstahl
conn. M12 Stecker M12	PVC, ultraflex	PVC, ultraflex	conn. M12 Stecker M12	conn. M12 Stecker M12
	built-in integriert		built-in integriert	
IHD14-S3PO65S-N12	IHD18S3PO65S-A2P	IHD18S3PO65S-N2P	IHD18S3PO79S-M12	IHD18S3PO79S-N12
IHD14-S3PC65S-N12	IHD18S3PC65S-A2P	IHD18S3PC65S-N2P	IHD18S3PC79S-M12	IHD18S3PC79S-N12
IHD14-S3NO65S-N12	IHD18S3NO65S-A2P	IHD18S3NO65S-N2P	IHD18S3NO79S-M12	IHD18S3NO79S-N12
IHD14-S3NC65S-N12	IHD18S3NC65S-A2P	IHD18S3NC65S-N2P	IHD18S3NC79S-M12	IHD18S3NC79S-N12

Minor changes possible
Geringfügige Änderungen möglich