

ORLVD PUK-ST3


- 20...35V DC, 200mA, PNP, NO, M8 male connector
- Dynamic switching characteristics



Technical Data


Switching function, dynamic	NO
Connection	Connector M8
Turn-off delay	1...150 ms
Rated supply voltage at DC	20 V...35 V
Operating temperature	0 °C...50 °C
Short-circuit proof	Yes
No-load current	60 mA
Power consumption	1,44 W
LED display	Yes
Number of pins	3
Switching capacity	4.8 VA
Switching voltage	35 V
Switching current	0.2 A
Protection class	IP65
Voltage drop	2 V
Output variant	dynamic
Reverse polarity protection	Yes
Housing	Aluminium

Connection

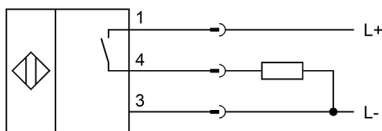

Colors: 1 = BN (brown), 3 = BU (blue), 4 = BK (black)

Functions: 1 = L+, 3 = L-, 4 = PNP NO

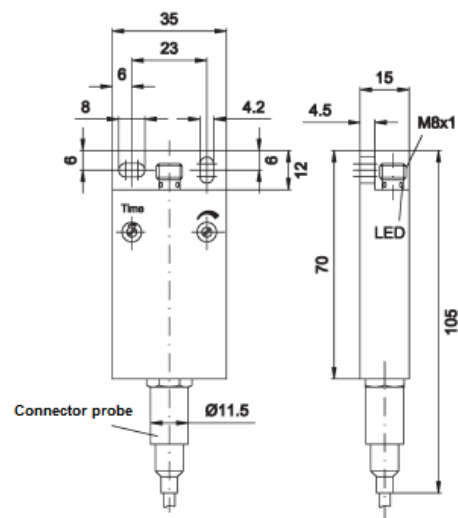

The informations are provided to best of our knowledge. Subject to change. These products must not applied when the safety of persons rely on their faultless function. Dietz Sensortechnik refuses the liability for consequential loss resulting from the application of sensors from Dietz.